


PILOT-OPERATED RELIEF VALVE (HT3H-025B)

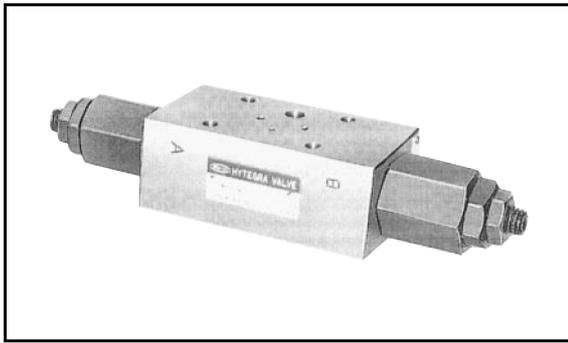

SPECIFICATIONS

Controlled Port	Model	Max. Operating Pressure (MPa)	Rated Flow (L/min)	Symbol	Pressure Adjustment Range			
A	HT3H-A-D*-025B	25	1.5		* symbol 1: 0.7 to 7 2: 3.5 to 14 3: 10.5 to 25			
	HT3H-A-D*S-025B							
	HT3H-A-D*E-025B							
	HT3H-A-D*ES-025B							
B	HT3H-B-D*-025B							
	HT3H-B-D*S-025B							
	HT3H-B-D*E-025B							
	HT3H-B-D*ES-025B							
A / B	HT3H-W-D*-025B				Refer to the table below.			

● Pressure Adjustment Range at A and B Ports


Model	Pressure Adjustment Range (MPa)	
	A-port Relief Valve	B-port Relief Valve
HT3H-W-D11-025B	0.7 to 7	0.7 to 7
HT3H-W-D12-025B		3.5 to 14
HT3H-W-D13-025B		10.5 to 25
HT3H-W-D22-025B	3.5 to 14	3.5 to 14
HT3H-W-D23-025B		10.5 to 25
HT3H-W-D33-025B		

EXTERNAL DIMENSIONS


● HT3H-A-D*(S)-025B

● HT3H-A-D*E(S)-025B

● HT3H-B-D*E(S)-025B

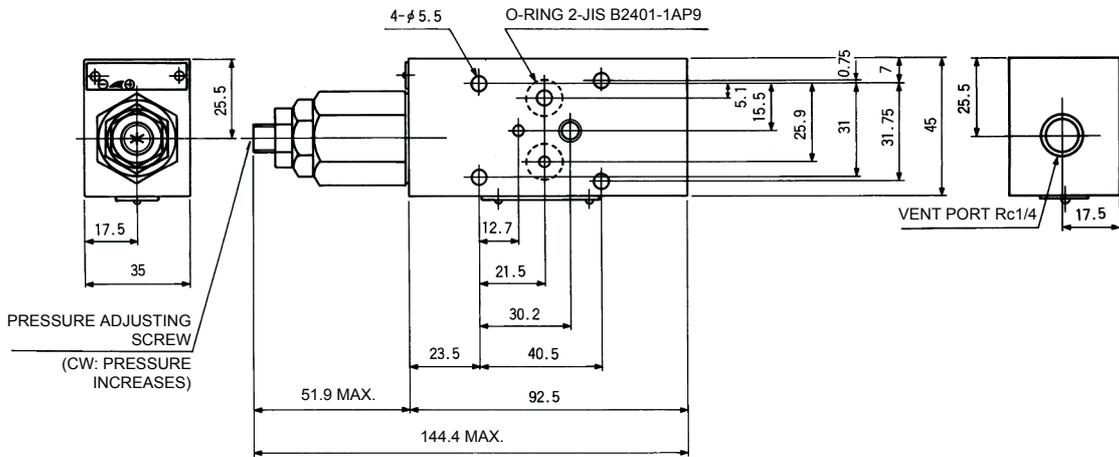


● HT3H-B-D*(S)-025B

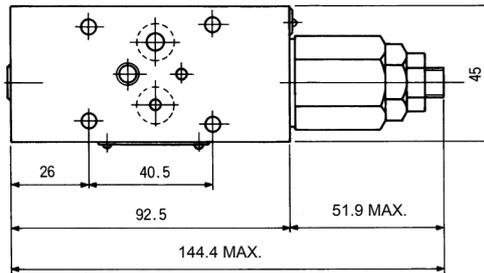

MASS: 1.14 kg

● HT3H-W-D*-025B

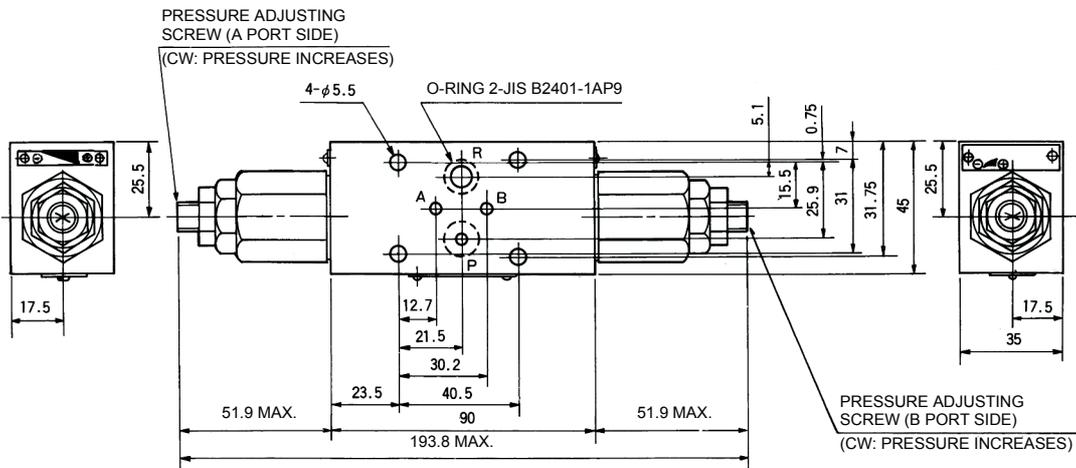

MASS: 1.28 kg