


PILOT-OPERATED RELIEF VALVE (HT) SIZE 02

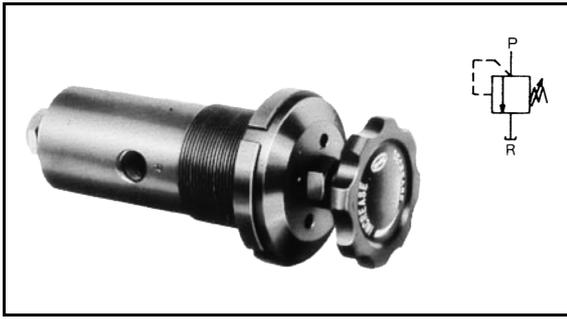


The pilot-operated relief valve is mainly used for remote control of the main circuit pressure by connecting it to the vent port (VE) of a balancing piston type relief valve. In a small-flow circuit, this type of valve can also be used as a direct acting type relief valve.

SPECIFICATIONS

Nominal Size	Rated Flow (L/min)	Max. Operating Pressure (MPa)	Pressure Adjustment Range (MPa)	Model
02	1.5	21	0.5 to 7	HT3-DT1-02
			3.5 to 14	HT3-DT2-02
			10.5 to 21	HT3-DT3-02
			0.5 to 21	HT3-DT5-02

EXTERNAL DIMENSIONS

● HT3-DT*-02

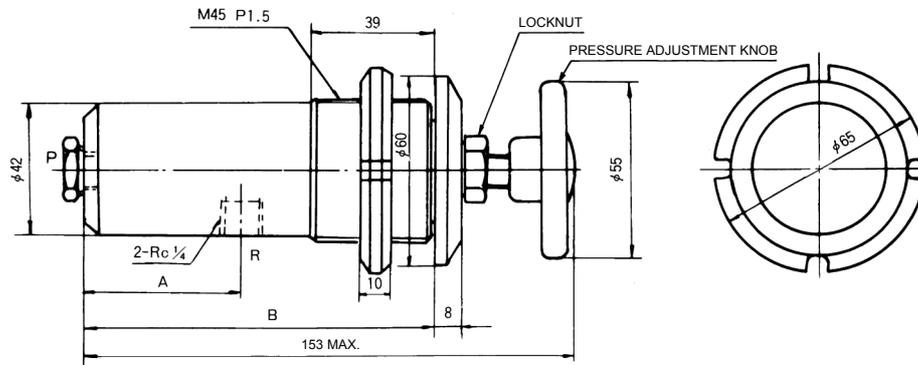

MASS: 1.3 kg

Model	A	B
HT3-DT*-02	49	111
HT3-DT5-02	54	112